

SUMMARY							
ID	30047	CPU OPTION:	NORTH INVENT PART NO:				
COMPANY NAME	North Invent Norway	Celeron 4305UE @ 2.2 GHz	WE215 000 320				
VAT	987884002VAT	i3-8145UE @ 2.2 GHz / 3.9 GHz	WE215 000 321				
ADDRESS	Sørhauggata 128	i5-8365UE @ 1.6 GHz / 4.1 GHz	WE215 000 322				
		i7-8665UE @ 1.7 GHz / 4.4 GHz	WE215 000 323				
	5527 Haugesund NORWAY	NB! To order optional PSU versions a page, please ask your North Inven	and / or I/Os listed on the next t representative for the correct P/N.				

REVISION HISTORY							
APPROVED	CHECKED	DRAWN	STATUS	DESCRIPTION			
2020.01.29	2020.01.29	2020.06.12	Issued for Customer	First Revision			
OKJ	OKJ	RNO	Review				


2018022201 1/4



The Wave PERFORMANCE Box is a state-of-the-art computer concept, derived from the interchangeable Electronics Unit of the already type approved Wave II monitors.

In addition to being a stand-alone box computer, the PERFORMANCE Box can be added on the back of a standard Wave II monitor to make up a Panel- PC (PPC); constituting the Wave PERFORMANCE Monitor. Extensive versatility allows for tailoring your optimal connections, SSDs, Memory and special features.

Designed for 10 years of manufacturing, the Wave PERFORMANCE Monitors are boasting powerful 8th Generation Intel® Core™ Processors. All Wave PERFORMANCE Boxes will remain fanless with low power consumption.



#### TECHNICAL SPECIFICATIONS Wave PERFORMANCE 21.5" NON-TOUCH

#### MATCHING STANDARDS


IEC 60945, IEC 61174 (ECDIS), IEC 62.288 (Navigation), IEC 62.388 (Radar), IACS E10, EMC Directive-2014/30/EU, RoHS, REACH Compliant to a selection of MIL standards


DISPLAY SIZE	21,5" - 546.1 mm, Active area 476.64 (W) X 268.11 (H) mm		
OVERALL DIMENSIONS	513.6 (W) x 310.6 (H) x 78 (D) mm		
NET / GROSS WEIGHT	7.0 / 10.1 kg		
RESOLUTION	Max 1920 x 1080 pixels (Full HD)		
RESPONSE TIME	16 ms		
CONTRAST RATIO	5000:1 (typ)		
CPU	Intel® Celeron 4305UE, Core i3-8145UE, i5-8365UE, i7-8665UE		
LIGHT INTENSITY	300 cd/m2 (typ)		
GRAPHICS	Intel® UHD Graphics 620		
VIEWING ANGLE	±89°		
SSD	3 x M2 slot + SATA, configurable size 120 GB-2TB. Std configuration: 120 GB		
SUPPLY VOLTAGE	90-264 VAC (IEC Inlet), 18-36 VDC or AC / DC Multipower optional.		
POWER CONSUMPTION	Approx. 46W		
RAM	DDR4 2400, configurable size. Standard configuration: 8 GB		
ENCLOSURE PROTECTION	IP 67 from front given correct mounting and sealing.		
GLASS TYPE	3mm Tempered, Anti Reflective Conturan@		
INPUT/ CONTROL INPUT	$2\times10/100/1000$ Ethernet (4 x 10/100/1000 optional), 2 x Display Port , $$ x USB 3.1 2 x USB 2.0, 2 x RS232/RS485/422 + 2 x RS232 (D-SUB), Line in + Line out (mini Jack), HMI (15pD-Sub)		
OPERATING / STORAGE TEMPERATURE	-15/+70° C, -15/+70° C (+5/+158° F, +5/+158° F)		
BACKLIGHT LIFE	Typ 50.000 Hours		
DIMMING RANGE	0-100%		
OS SUPPORTED	Linux and Windows		
тоисн	NO		
COMPASS SAFE DISTANCES	Standard Compass 190 cm, Steering Compass 120 cm		


2018101001 2/4





### TECHNICAL SPECIFICATIONS Wave PERFORMANCE 21.5" NON-TOUCH









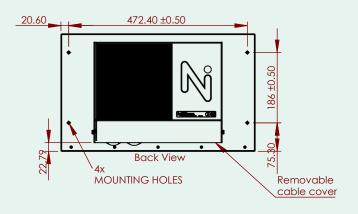


2018021702 3/4



### TECHNICAL SPECIFICATIONS Wave PERFORMANCE 21.5" NON-TOUCH

#### Included in Part 1 of 1

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	WE999 000 126	1.8m, AC Power Cable	1

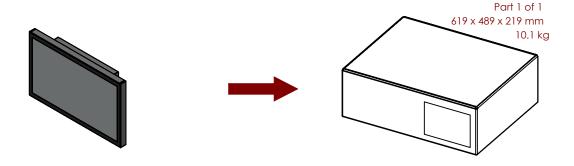

2018021702 4/4

