

SUMMARY						
CUSTOMER ID	30047	CPU OPTION:	NORTH INVENT PART NO:			
COMPANY NAME	North Invent Norway	Celeron 4305UE @ 2.2 GHz	WE270 000 465			
VAT	987884002VAT	i3-8145UE @ 2.2 GHz / 3.9 GHz	WE270 000 466			
ADDRESS	Sørhauggata 128	i5-8365UE @ 1.6 GHz / 4.1 GHz	WE270 000 467			
		i7-8665UE @ 1.7 GHz / 4.4 GHz	WE270 000 468			
	5527 Haugesund Norway	NB! To order optional PSU versions and / or I/Os listed on the next page, please ask your North Invent representative for the correct P/N				

REVISION HISTORY							
APPROVED	CHECKED	DRAWN	STATUS	DESCRIPTION			
2021.04.10 OKJ	2021.04.10 OKJ	2021.04.10 ØKJ	Issued for Customer Review	First Revision			


2018022201 1/5



The Wave PERFORMANCE Box is a state-of-the-art computer concept, derived from the interchangeable Electronics Unit of the already type approved Wave II monitors.

In addition to being a stand-alone box computer, the PERFORMANCE Box can be added on the back of a standard Wave II monitor to make up a Panel- PC (PPC); constituting the Wave PERFORMANCE Monitor. Extensive versatility allows for tailoring your optimal connections, SSDs, Memory and special features.

Designed for 10 years of manufacturing, the Wave PERFORMANCE Monitors are boasting powerful 8th Generation Intel® Core™ Processors. All Wave PERFORMANCE Boxes will remain fanless with low power consumption.



TECHNICAL SPECIFICATIONS Wave PERFORMANCE 27" NON-TOUCH

MATCHING STANDARDS


IEC 60945, IEC 61174 (ECDIS), IEC 62.288 (Navigation), IEC 62.388 (Radar), IACS E10, EMC Directive-2014/30/EU, RoHS, REACH Compliant to a selection of MIL standards


DISPLAY SIZE	27,0" - 685.8 mm, Active area 597.6 (W) X 336.15 (H) mm	
OVERALL DIMENSIONS	631 (W) x 377.6 (H) x 78 (D) mm	
NET / GROSS WEIGHT	8.5 / 11.4 kg	
RESOLUTION	Max 1920 x 1080 pixels (Full HD)	
RESPONSE TIME	12 ms	
CONTRAST RATIO	3000:1 (typ)	
CPU	Intel® Celeron 4305UE, Core i3-8145UE, i5-8365UE, i7-8665UE	
LIGHT INTENSITY	350 cd/m2 (typ)	
GRAPHICS	Intel® UHD Graphics 620	
VIEWING ANGLE	±89°	
SSD	3 x M2 slot + SATA, configurable size 120 GB-2TB. Std configuration: 120 GB	
SUPPLY VOLTAGE	18-36 VDC (90-264 VAC (IEC Inlet) or AC / DC Multipower optional).	
POWER CONSUMPTION	Approx. 60W	
RAM	DDR4 2400, configurable size. Standard configuration: 8 GB	
ENCLOSURE PROTECTION	IP 67 from front given correct mounting and sealing.	
GLASS TYPE	3mm Tempered, Anti Reflective Conturan@	
INPUT/ CONTROL INPUT	$2\times10/100/1000$ Ethernet (4 x 10/100/1000 optional), 2 x Display Port , 4 x USB 3.1 2 x RS232/RS485/422 + 2 x RS232 (D-SUB), Line in + Line out (mini Jack), HMI (15p D-Sub)	
OPERATING / STORAGE TEMPERATURE	-15/+55° C, -15/+70° C (+5/+131° F, +5/+158° F)	
BACKLIGHT LIFE	Typ 50.000 Hours	
DIMMING RANGE	0-100%	
OS SUPPORTED	Linux and Windows	
TOUCH	NO	
COMPASS SAFE DISTANCES	Standard Compass 190 cm, Steering Compass 120 cm	


2018101001 2/5



TECHNICAL SPECIFICATIONS Wave PERFORMANCE 27" NON-TOUCH








2018021702 3/5




TECHNICAL SPECIFICATIONS Wave PERFORMANCE 27" NON-TOUCH

Bottom View



Back View

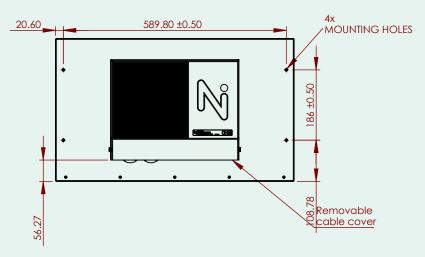


2018021702 4/5



TECHNICAL SPECIFICATIONS Wave PERFORMANCE 27" NON-TOUCH

Included in Part 1 of 1

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.

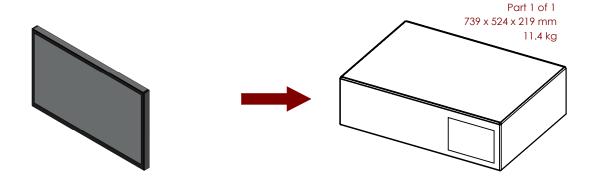

2018021702

5/5

NT 28, esund, Norway 84 02 00