

# 10.1" PANEL COMPUTER



## SUMMARY

CUSTOMER ID	30047	CPU OPTION	NORTH INVENT PART NO:
COMPANY NAME	North Invent Norway	INTEL ATOM x6425E Quad Core @ 2.0 GHz (2.7 GHz)	WE101 000 597
VAT	987884002VAT		
ADDRESS	Sørhauggata 128		
	5527 Haugesund	NB! To order optional PSU versions and / or I/Os, please ask your North Invent contactperson.	
	NORWAY		

## REVISION HISTORY

APPROVED	CHECKED	DRAWN	STATUS	DESCRIPTION
2023.09.01 OKJ	2023.09.01 OKJ	2023.09.01 OKJ	Issued for Customer Review	First Revision, illustrations to be updated
2024.19.02 NIP	2024.19.02 NIP	2024.19.02 NIP	Issued for Customer Review	General Update

# 10.1" PANEL COMPUTER

The North Invent 10.1" Panel Computer is a state-of-the-art computer concept, built with industrial extended temperature components.

Designed for 10 years of manufacturing, the North Invent 10.1" Panel Computer is boasting powerful 11th Generation Intel® Atom™ Processors.

It has 10 point PCAP multitouch integrated into a slim design.

As for all North Invent products the will unit remains fanless with low power consumption.



## TECHNICAL SPECIFICATIONS 10.1" Panel Computer

### MATCHING STANDARDS

IEC 60945, IEC 60529 (IP), IACS E10, EMC Directive-2014/30/EU, RoHS, REACH.

Compliant to a selection of MIL standards.

### DISPLAY SIZE

10.1" - Active area 216.96 (W) X 135.60 (H) mm

### OVERALL DIMENSIONS

244 (W) x 167 (H) x 50,54 (D) mm

### NET / GROSS WEIGHT

1.7 / 2.5 kg

### RESOLUTION

Max 1280 x 800 pixels

### RESPONSE TIME

13 ms (typ)

### CONTRAST RATIO

800:1 (typ)

### CPU

Intel® Atom x6425E @ 2.0 GHz (2.7 GHz)

### LIGHT INTENSITY

700 cd/m2 (typ)

### GRAPHICS

Intel® UHD Graphics (Gen11)

### VIEWING ANGLE

±88°

### STORAGE

64GB eMMC 5.1 onboard flash

### SUPPLY VOLTAGE

Wide Range 9-36 VDC

### POWER CONSUMPTION

Approx. 35W

### RAM

8GB 3733 MT/s LPDDRx onboard memory

### ENCLOSURE PROTECTION

IP 67 from front given correct mounting and sealing.

### GLASS TYPE

3.0 mm Tempered, Anti Reflective

### INPUT/ OUTPUT

2 x 10/100/1000 Ethernet RJ45 with TPM 2.0, 1 x DisplayPort (DP++) output, 1x USB 3.1 Gen2 Type C, 2 x USB 3.1 Gen 2 Type A, 1 x RS232 (9-pin DSUB), 1 x RS422 (9-pin DSUB).

### OPERATING / STORAGE TEMPERATURE

-30/+70° C, -30/+70° C (-22/+158° F, -22/+158° F)

### BACKLIGHT LIFE

Typ 50.000 Hours

### DIMMING RANGE

0-100%

### OS SUPPORTED


Linux and Windows

### TOUCH

10 Point PCAP Multitouch

# 10.1" PANEL COMPUTER

## TECHNICAL SPECIFICATIONS 10.1" Panel Computer

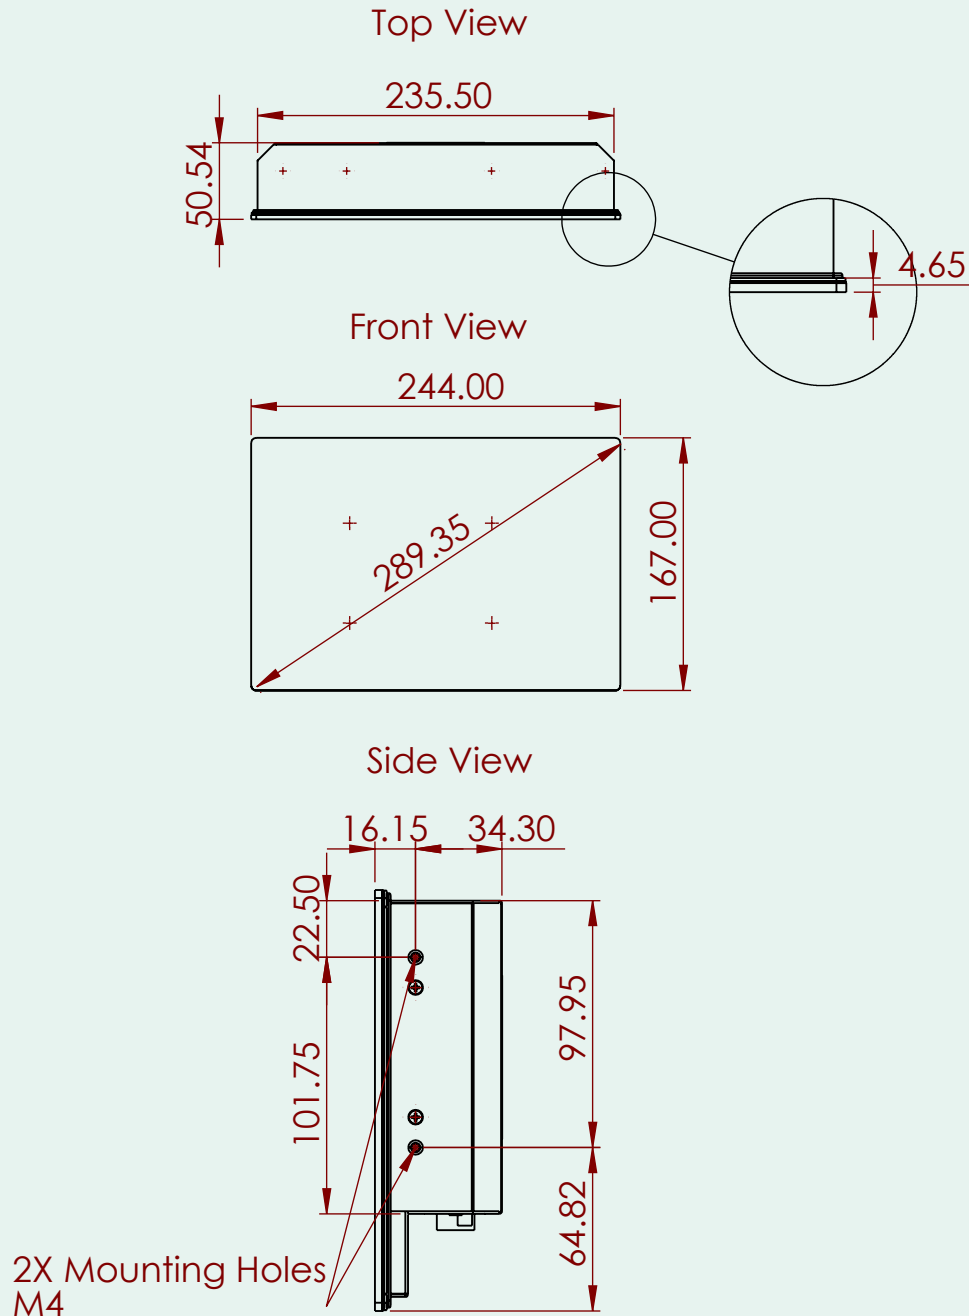


# 10.1" PANEL COMPUTER

## TECHNICAL SPECIFICATIONS 10.1" Panel Computer


Bottom View



Back View

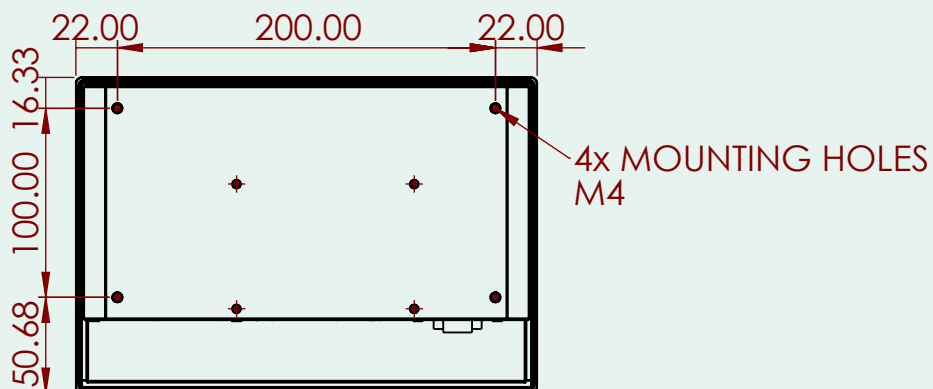




Cut out

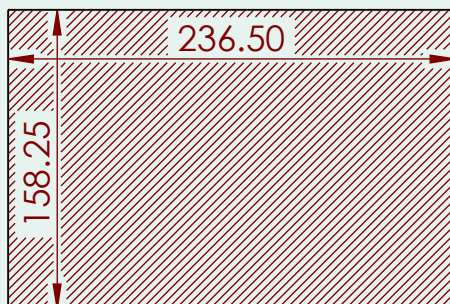

# 10.1" PANEL COMPUTER

## TECHNICAL SPECIFICATIONS 10.1" Panel Computer

### Mounting Brackets

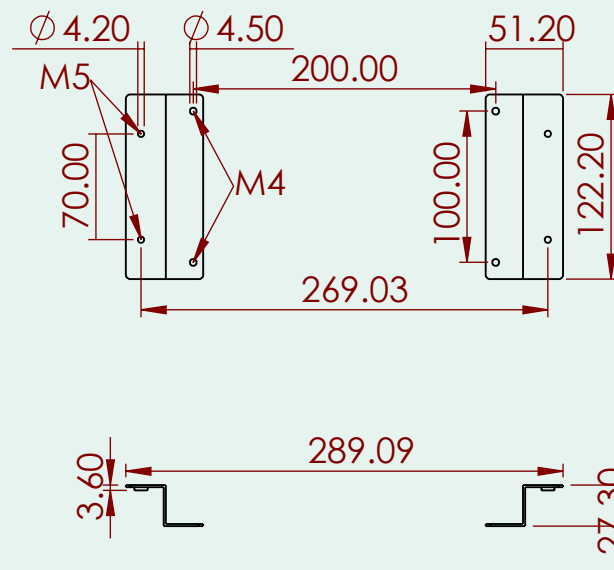

# 10.1" PANEL COMPUTER

## TECHNICAL SPECIFICATIONS 10.1" Panel Computer

